

Acrylitex[®]

MPI #50



ACRYLITEX MPI #50 is a high quality PVA intended for use on new interior wallboard, plaster, and concrete. It has exceptional holdout properties, making it a great undercoat for a finish of any gloss level.


Meets MPI #50 specifications

High quality primer/sealer

Promotes uniform appearance of topcoats

Exceptional holdout

VOC compliant

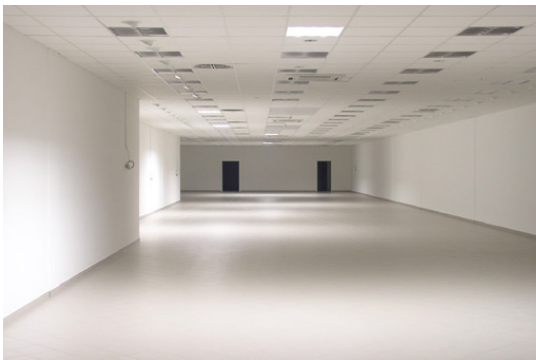

Coverage: Apply at 250–300 square feet per gallon yielding 5–6 wet mils.

Application: Apply product at can consistency. No thinning is necessary. Brush, roll, or spray application.

Dry Time: Acrylitex MPI #50 is dry to the touch in 1 hour and ready for recoat in 3–4 hours @ 70°F and 50% relative humidity.

Cleanup: Wipe up drips and spills immediately with a wet cloth. Clean tools with soap and water.



Acrylic
Technologies, Inc.